




1380 Beverage Drive, Suite W
Stone Mountain, GA 30083
1-800-426-6256 | 770-243-2323

Gooseneck

Operation and Maintenance Guide

Better – Faster – Every time

Model: 85T

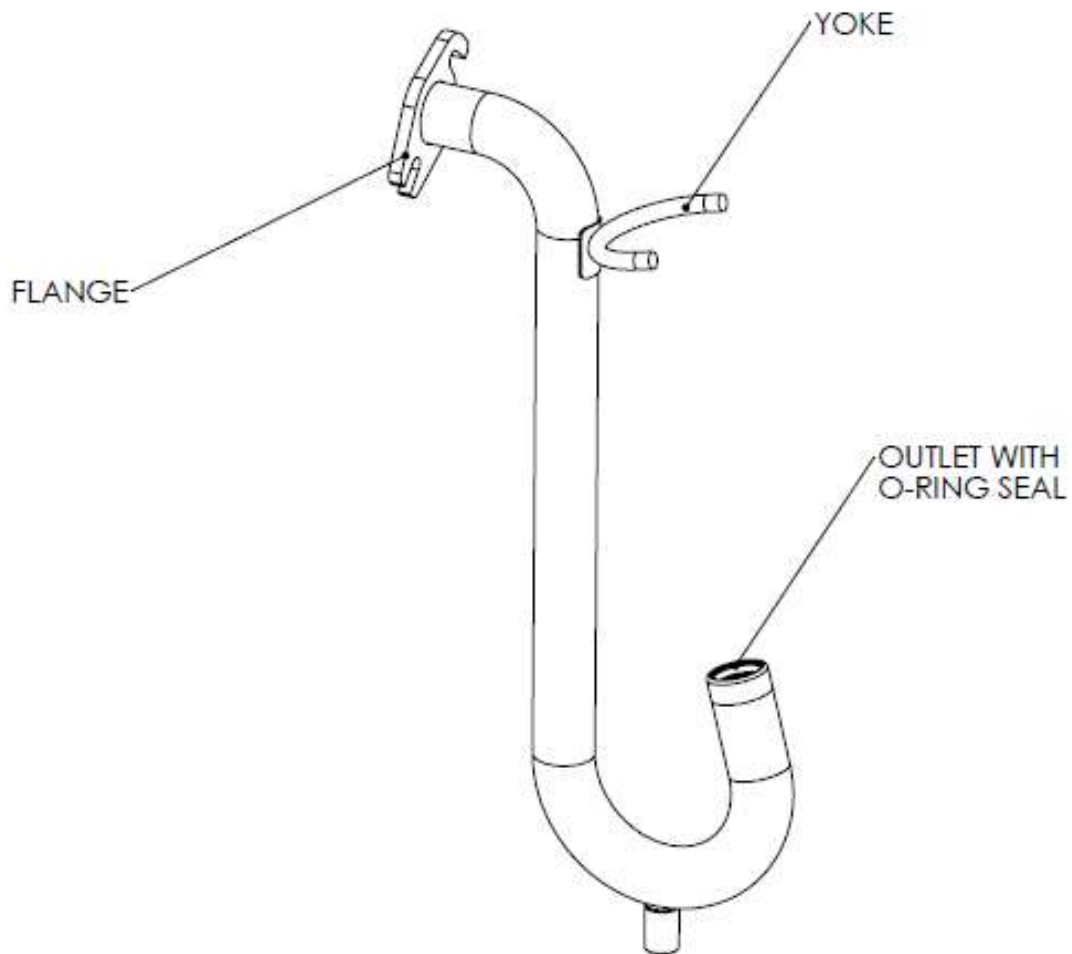



1380 Beverage Drive, Suite W
Stone Mountain, GA 30083
1-800-426-6256 | 770-243-2323

Gooseneck

Operation and Maintenance Guide

Better – Faster – Every time

Operation

The gooseneck is attached to the EasyClean® Pump and is used to fill the automatic taper. Place the EasyClean® Pump gasket (#700049) on the EasyClean® Pump housing, over the protruding studs. Then, set the gooseneck over the studs and tighten the hex nuts firmly to prevent leakage.

Maintenance

Remove the gooseneck from the EasyClean® Pump and clean thoroughly with a brush and water (or a water hose) to remove all joint compound from the tool. Then, after the tool is clean, lightly oil with Ames® Bazooka® Oil or any light machine oil.

